

AGT 6000-24 PVMV-N

Article: 0005437

General Technical Data

Vehicle Generator designed for installation within vehicle with integrated water-cooled exhaust (requires external radiator)

Generator Type	Hybrid Power
Generator Family	6000
Generator Version	PVMV-N
Area of Application	Vehicle
Capsule Type	GFK 4DS
Generator Manufacturer	Fischer Panda GmbH
Windings Isolation Class	H
Control System	VCS
Voltage Tolerance	
Cos Phi	1
Sound Levels dB(A) [7m/3m/1m]	53 / 63 / 67
Weight (kg)	189
Capsule Dimensions (excl. fittings)	760 x 515 x 609



Electrical Alternator

Engine Speed [rpm]	2400 - 3000
Voltage	24
Frequency [Hz]	400
Number Phases	-/-
Continuous Performance [kW]	4,8
Continuous Performance [kVA]	



Engine

Engine Manufacturer	Kubota
Engine Type	KU Z482
No. Cylinders	2
Displacement [cm ³]	479
Starter System	12 V
Emission Regulations	US 40CFR 1039 EU 2016/1628 China 20891-2014

Service / Installations Kits/ Shock mountings

Service Kit	0000693
Service Kit "Plus"	0006365
Shock mounting, captive	0002753

Generator Capsule / Sound Shield

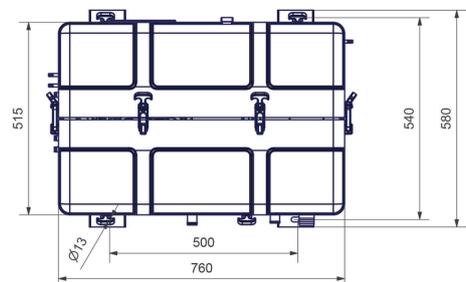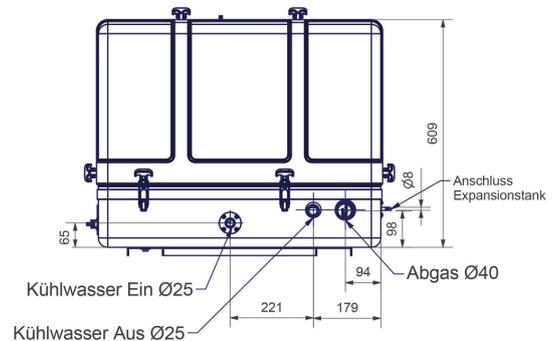

[▶ LEARN MORE](#)

