

Panda 10000i PVK-U

Article: 0013502

General Technical Data

Vehicle Generator designed for external installation on vehicle chassis with integrated water-cooled exhaust (requires external radiator)

| | |
|-------------------------------------|-------------------------|
| Generator Type | iSeries - Perfect Power |
| Generator Family | 10000i |
| Generator Version | PVK-U |
| Area of Application | Vehicle |
| Capsule Type | MPL 4DS |
| Generator Manufacturer | Fischer Panda GmbH |
| Windings Isolation Class | H |
| Control System | iControl |
| Voltage Tolerance | 3% |
| Cos Phi | 0.80 |
| Sound Levels dB(A) [7m/3m/1m] | 52 / 62 / 67 |
| Weight (kg) | |
| Capsule Dimensions (excl. fittings) | 809 x 530 x 620 |



Electrical Alternator

| | |
|---------------------------|-------------|
| Engine Speed [rpm] | 2200 - 2800 |
| Voltage | 230 |
| Frequency [Hz] | 50 |
| Number Phases | 1 |
| Nominal Performance [kW] | 8,0 |
| Nominal Performance [kVA] | 10,0 |


Engine

| | |
|---------------------------------|---|
| Engine Manufacturer | Kubota |
| Engine Type | KU Z602 |
| No. Cylinders | 2 |
| Displacement [cm ³] | 599 |
| Starter System | 12 V |
| Emission Regulations | US 40CFR 1039 EU 2016/1628 China 20891-2014 |

Service / Installations Kits/ Shock mountings

| | |
|-------------------------|---------|
| Service Kit | 0006386 |
| Service Kit "Plus" | 0026191 |
| Shock mounting, captive | 0002753 |

Generator Capsule / Sound Shield

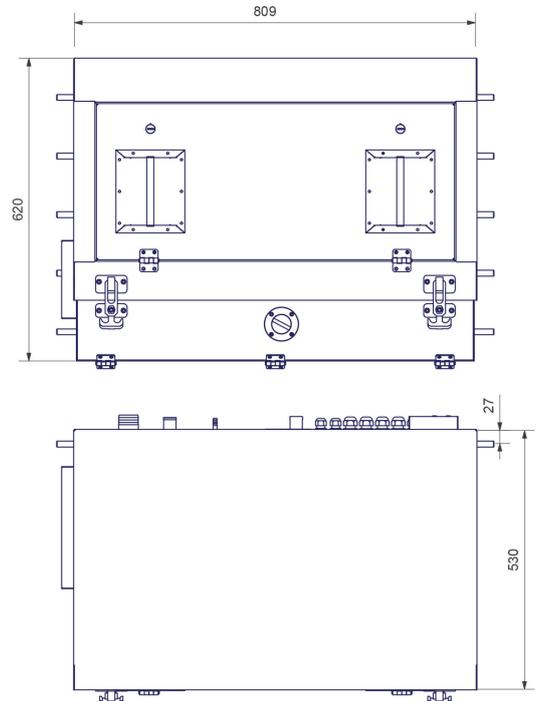

[> LEARN MORE](#)

