

Panda 15000i 400 V PVK-U



Article: 0017940

General Technical Data

Vehicle Generator designed for external installation on vehicle chassis with integrated water-cooled exhaust (requires external radiator)



Generator Type	iSeries - Perfect Power
Generator Family	15000i-400V
Generator Version	PVK-U
Area of Application	Vehicle
Capsule Type	MPL 4DS
Generator Manufacturer	Fischer Panda GmbH
Windings Isolation Class	H
Control System	iControl
Voltage Tolerance	3%
Cos Phi	0.80
Sound Levels dB(A) [7m/3m/1m]	54 / 64 / 68
Weight (kg)	268
Capsule Dimensions (excl. fittings)	910 x 530 x 600



Electrical Alternator

Engine Speed [rpm]	2200 - 2800
Voltage	400
Frequency [Hz]	50
Number Phases	3
Nominal Performance [kW]	12,0
Nominal Performance [kVA]	15,0

Generator Capsule / Sound Shield

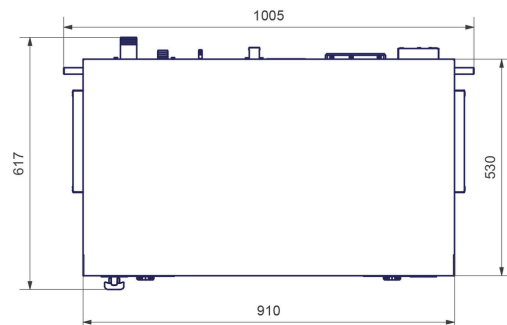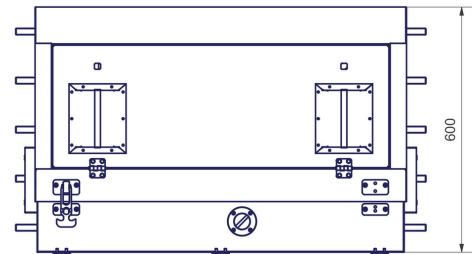

Engine

Engine Manufacturer	Kubota
Engine Type	KU D902
No. Cylinders	3
Displacement [cm ³]	898
Starter System	12 V
Emission Regulations	US 40CFR 1039 EU 2016/1628 China 20891-2014

Service / Installations Kits/ Shock mountings

Service Kit	0000693
Service Kit "Plus"	0006393
Shock mounting, captive	0002752

[LEARN MORE](#)



Disclaimer: The information contained here is to the best of our knowledge accurate at the date of publication. Please note that the data in this publication reflects the technical state at time of print. Due to our policy of continual product development, we reserve the right to alter technical specifications without notice. The technical parameters / output performance may vary for different generator types and exhaust emission norms for different countries. All performance data applies to generator operation at 100m above sea level at 20°C. Performance reductions can occur when operating at greater heights.