

Panda 5000i PVK-U

Article: 0005547

General Technical Data

Vehicle Generator designed for external installation on vehicle chassis with integrated water-cooled exhaust (requires external radiator)

Generator Type	iSeries - Perfect Power
Generator Family	5000i
Generator Version	PVK-U
Area of Application	Vehicle
Capsule Type	MPL 4DS
Generator Manufacturer	Fischer Panda GmbH
Windings Isolation Class	H
Control System	iControl
Voltage Tolerance	3%
Cos Phi	0.80
Sound Levels dB(A) [7m/3m/1m]	54 / 64 / 68
Weight (kg)	140
Capsule Dimensions (excl. fittings)	761 x 447 x 440



Electrical Alternator

Engine Speed [rpm]	2200 - 2800
Voltage	230
Frequency [Hz]	50
Number Phases	1
Nominal Performance [kW]	4,0
Nominal Performance [kVA]	5,0



Engine

Engine Manufacturer	Kubota
Engine Type	KU EA300
No. Cylinders	1
Displacement [cm ³]	309
Starter System	12 V
Emission Regulations	

Service / Installations Kits/ Shock mountings

Service Kit	0000692
Service Kit "Plus"	0000696
Shock mounting, captive	0002752

Generator Capsule / Sound Shield

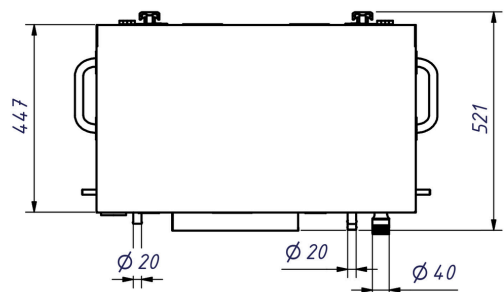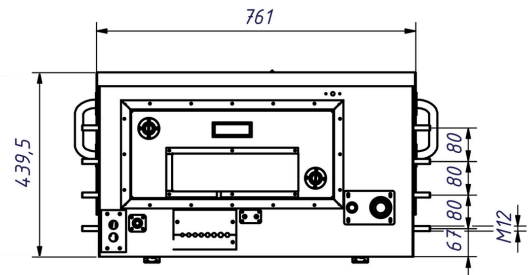

[> LEARN MORE](#)

