

# Panda 10000x PMS

Article: 0028283

## General Technical Data

### Water-cooled Marine Generator

Generator Type	xSeries - Compact Power
Generator Family	10000x
Generator Version	PMS
Area of Application	Marine
Capsule Type	GFK 3D
Generator Manufacturer	Fischer Panda GmbH
Windings Isolation Class	H
Control System	xControl / fpControl
Voltage Tolerance	3V
Cos Phi	0.85
Sound Levels dB(A) [7m/3m/1m]	52 / 62 / 67
Weight (kg)	175
Capsule Dimenisons (excl. fittings)	650 x 445 x 570



## Electrical Alternator

Engine Speed [rpm]	3000
Voltage	230
Frequency [Hz]	50
Number Phases	1
Nominal Performance [kW]	8,0
Nominal Performance [kVA]	9,4



## Engine

Engine Manufacturer	Kubota
Engine Type	KU Z602
No. Cylinders	2
Displacement [cm3]	599
Starter System	12 V
Emission Regulations	IMO MARPOL 73/78 US 40CFR 1042 EU 2016/1628 China 20891-2014

## Service / Installations Kits/ Shock mountings

Service Kit	0006383
Service Kit "Plus"	request
Installation Kit "Basic"	0000677
Installation kit Premium	0000674
Shock mounting, captive	0002752
Shock mounting, non-captive	0009675

## Generator Capsule / Sound Shield

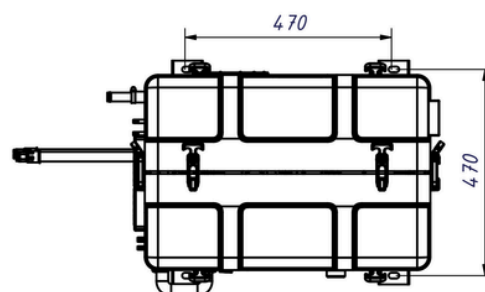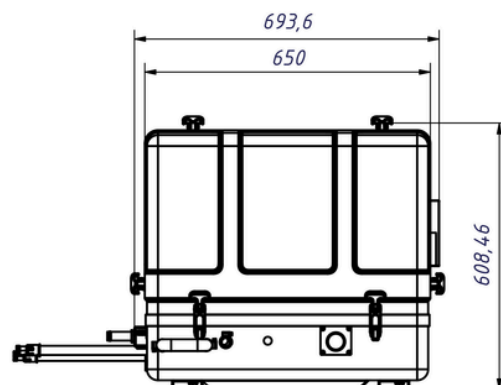

[LEARN MORE](#)

