

# Panda 18x PMS

Article: 0004789

## General Technical Data

### Water-cooled Marine Generator

Generator Type	xSeries - Compact Power
Generator Family	18x
Generator Version	PMS
Area of Application	Marine
Capsule Type	GFK 3D
Generator Manufacturer	Fischer Panda GmbH
Windings Isolation Class	H
Control System	xControl / fpControl
Voltage Tolerance	3V
Cos Phi	0.85
Sound Levels dB(A) [7m/3m/1m]	55 / 65 / 69
Weight (kg)	297
Capsule Dimenisons (excl. fittings)	832 x 517 x 620



## Electrical Alternator

Engine Speed [rpm]	3000
Voltage	230
Frequency [Hz]	50
Number Phases	1
Nominal Performance [kW]	15,3
Nominal Performance [kVA]	18,0



## Engine

Engine Manufacturer	Kubota
Engine Type	KU D1105
No. Cylinders	3
Displacement [cm3]	1123
Starter System	12 V
Emission Regulations	IMO MARPOL 73/78

## Service / Installations Kits/ Shock mountings

Service Kit	0000691
Service Kit "Plus"	0006362
Installation Kit "Basic"	0000673
Installation kit Premium	0000676
Shock mounting, captive	0002753
Shock mounting, non-captive	

## Generator Capsule / Sound Shield

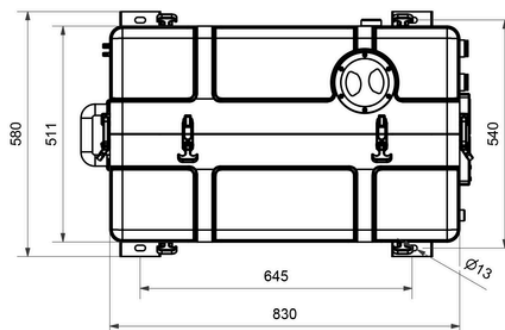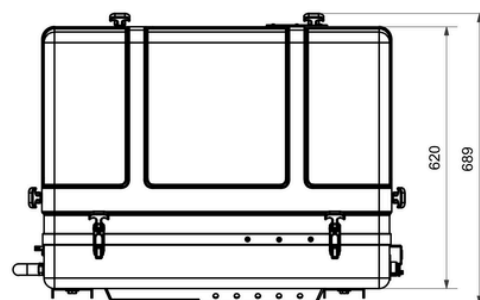

[LEARN MORE](#)

