

Panda 30ICx PMS

Article: 0027630

General Technical Data

Water-cooled Marine Generator

Generator Type	xSeries - Compact Power
Generator Family	30ICx
Generator Version	PMS
Area of Application	Marine
Capsule Type	GFK 3D
Generator Manufacturer	Fischer Panda GmbH
Windings Isolation Class	H
Control System	xControl / fpControl
Voltage Tolerance	3V
Cos Phi	0.85
Sound Levels dB(A) [7m/3m/1m]	55 / 65 / 69
Weight (kg)	410
Capsule Dimenisons (excl. fittings)	1010 x 515 x 674



Electrical Alternator

Engine Speed [rpm]	3000
Voltage	400
Frequency [Hz]	50
Number Phases	3
Nominal Performance [kW]	27,0
Nominal Performance [kVA]	31,7



Engine

Engine Manufacturer	Kubota
Engine Type	KU V1505IC
No. Cylinders	4
Displacement [cm3]	1498
Starter System	12 V
Emission Regulations	IMO MARPOL 73/78

Service / Installations Kits/ Shock mountings

Service Kit	0000691
Service Kit "Plus"	0006371
Installation Kit "Basic"	0000673
Installation kit Premium	0006274
Shock mounting, captive	0002754
Shock mounting, non-captive	

Generator Capsule / Sound Shield

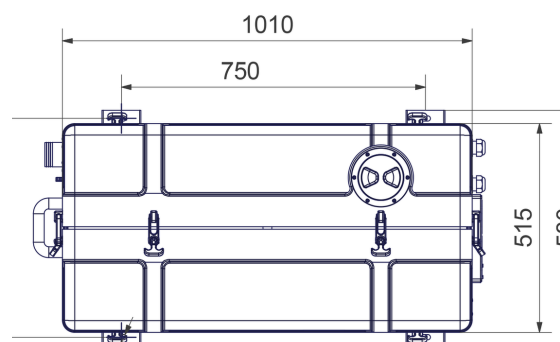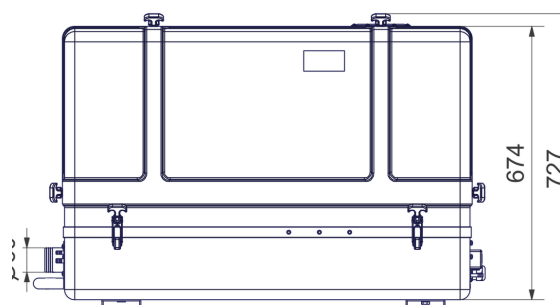

[LEARN MORE](#)

