

# Panda 60i PMS

Article: 0013458

## General Technical Data

### Water-cooled Marine Generator

Generator Type	iSeries - Perfect Power
Generator Family	60i
Generator Version	PMS
Area of Application	Marine
Capsule Type	MPL 6DS
Generator Manufacturer	Fischer Panda GmbH
Windings Isolation Class	H
Control System	iControl
Voltage Tolerance	3%
Cos Phi	0.80
Sound Levels dB(A) [7m/3m/1m]	55 / 60 / 70
Weight (kg)	670
Capsule Dimenisons (excl. fittings)	1313 x 800 x 870



## Electrical Alternator

Engine Speed [rpm]	1500 - 2800
Voltage	400
Frequency [Hz]	50
Number Phases	3
Nominal Performance [kW]	48,0
Nominal Performance [kVA]	60,0


## Engine

Engine Manufacturer	Hatz
Engine Type	HA 4H50TIC
No. Cylinders	4
Displacement [cm <sup>3</sup> ]	1952
Starter System	12 V
Emission Regulations	IMO MARPOL 73/78

## Service / Installations Kits/ Shock mountings

Service Kit	0006399
Service Kit "Plus"	0006398
Installation Kit "Basic"	0023179
Installation kit Premium	0023180
Shock mounting, captive	0002757
Shock mounting, non-captive	

## Generator Capsule / Sound Shield

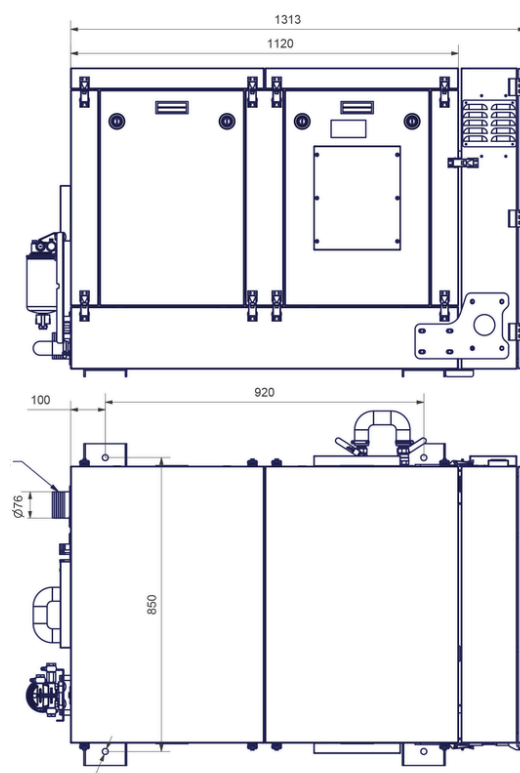

[LEARN MORE](#)

