

Panda 18x-400V PVK-UK

Article: 0029426

General Technical Data

Vehicle Generator designed for external installation with integrated water-cooled exhaust and radiator

Generator Type	xSeries - Compact Power
Generator Family	18x
Generator Version	PVK-UK
Area of Application	Vehicle
Capsule Type	MPL 4DS
Generator Manufacturer	Fischer Panda GmbH
Windings Isolation Class	H
Control System	xControl / fpControl
Voltage Tolerance	
Cos Phi	0.85
Sound Levels dB(A) [7m/3m/1m]	55 / 65 / 69
Weight (kg)	544
Capsule Dimensions (excl. fittings)	1736 x 560 x 680



Electrical Alternator

Engine Speed [rpm]	3000
Voltage	400
Frequency [Hz]	50
Number Phases	3
Nominal Performance [kW]	15,3
Nominal Performance [kVA]	18,0


Engine

Engine Manufacturer	Kubota
Engine Type	KU D1105
No. Cylinders	
Displacement [cm ³]	
Starter System	12 V
Emission Regulations	

Service / Installations Kits/ Shock mountings

- Service Kit
- Service Kit "Plus"
- Shock mounting, captive

Generator Capsule / Sound Shield

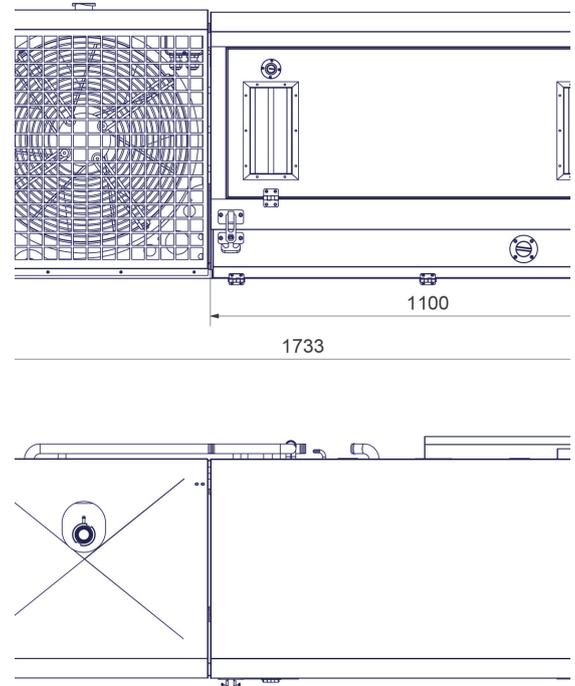

[LEARN MORE](#)

