

Panda 30x PVK-UK

Article: 0005206

General Technical Data

Vehicle Generator designed for external installation with integrated water-cooled exhaust and radiator


Generator Type	xSeries - Compact Power
Generator Family	30x
Generator Version	PVK-UK
Area of Application	Vehicle
Capsule Type	MPL 4DS
Generator Manufacturer	Fischer Panda GmbH
Windings Isolation Class	H
Control System	xControl / fpControl
Voltage Tolerance	3V
Cos Phi	0.85
Sound Levels dB(A) [7m/3m/1m]	55 / 65 / 69
Weight (kg)	687
Capsule Dimensions (excl. fittings)	1970 x 564 x 640



Electrical Alternator


Engine Speed [rpm]	3000
Voltage	230
Frequency [Hz]	50
Number Phases	1
Nominal Performance [kW]	25,5
Nominal Performance [kVA]	30,0

Generator Capsule / Sound Shield

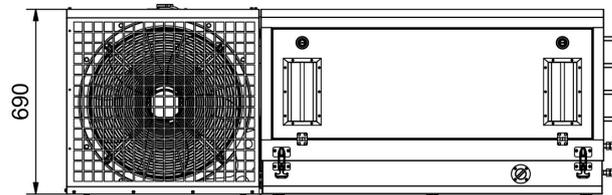

Engine

Engine Manufacturer	Kubota
Engine Type	KU V1505T
No. Cylinders	4
Displacement [cm ³]	1498
Starter System	12 V
Emission Regulations	

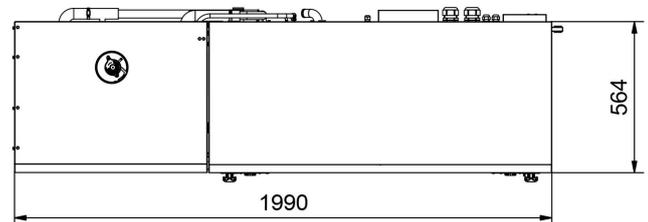

Service / Installations Kits/ Shock mountings

Service Kit	0006355
Service Kit "Plus"	0006370
Shock mounting, captive	0002754

[LEARN MORE](#)

