

# Panda 30x CR PVM

Article Number: 0038177

## Generator

Generator Type	: Compact Power
Generator Family	: xSeries PVM
Generator Version	: 30 CR
Area of Application	: Vehicle
Generator Manufacturer	: Fischer Panda GmbH
Control System	: xControl

## Electrical Information

Nominal Power kW / kVA	: 400 V Version : 27.5 / 27.5
Cont. Power kW	: 25.0
Voltage	: 400 V AC
Current	: 36.8 A
Frequency	: 50 Hz

## Engine

Manufacturer	: Kubota
Engine Type	: V1505-CR T
Number of Cylinders	: 4
Displacement	: 1,498 L
Speed	: 3,000 rpm
Injection Type	: Common Rail System
Emission Compliance EU	: EU Stage 5
USA	: US EPA Tier 4 final


## General Technical Information




Sound Capsule	: MPL (Metal Profi Line)
Sound Insulation	: 4DS
Sound Levels :	: 55 / 65 / 69 dbA
7 m / 5 m / 1 m	

Dimensions	Length	: 1272 mm
	Width	: 620 mm
	Height	: 789 mm
Generator Weight (Dry)		: 553 kg

## Radiators Available (no intercooler required)

Roof mounted	: RD 16.2
Side mounted /	: RV 13.160 with Ventilator
Under vehicle	: 1 x 400-50-3 (Article No. 0005821)

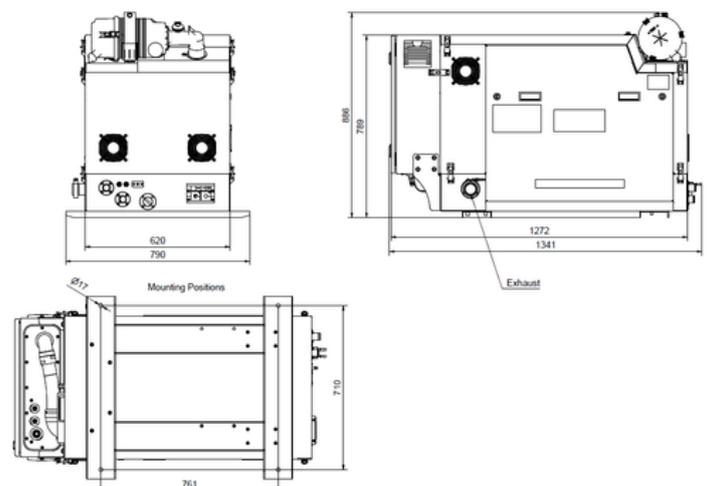

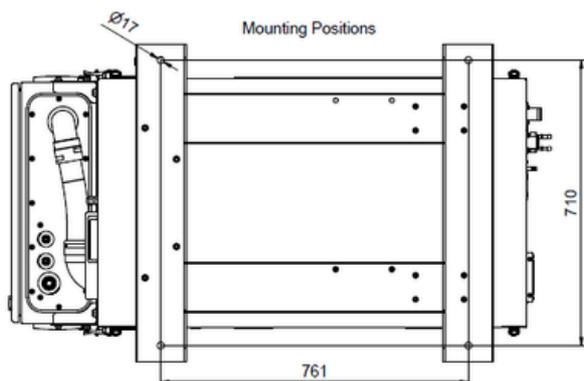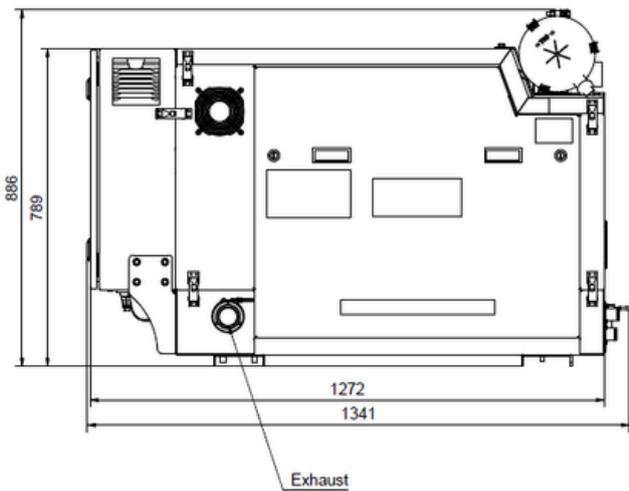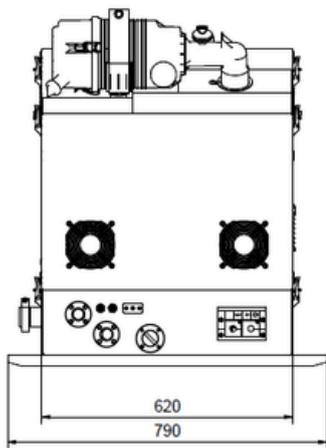

Mounting Positions