

# Panda 30x-400V PVMV-N

Article: 0024617

## General Technical Data

Vehicle Generator designed for installation within vehicle with integrated water-cooled exhaust (requires external radiator)

Generator Type	xSeries - Compact Power
Generator Family	30x
Generator Version	PVMV-N
Area of Application	Vehicle
Capsule Type	MPL 4DS
Generator Manufacturer	Fischer Panda GmbH
Windings Isolation Class	H
Control System	xControl / fpControl
Voltage Tolerance	
Cos Phi	0.85
Sound Levels dB(A) [7m/3m/1m]	55 / 65 / 69
Weight (kg)	512
Capsule Dimensions (excl. fittings)	1270 x 570 x 700



## Electrical Alternator


Engine Speed [rpm]	3000
Voltage	400
Frequency [Hz]	50
Number Phases	3
Nominal Performance [kW]	25,5
Nominal Performance [kVA]	30,0

## Generator Capsule / Sound Shield



## Engine

Engine Manufacturer	Kubota
Engine Type	KU V1505T
No. Cylinders	
Displacement [cm <sup>3</sup> ]	
Starter System	12 V
Emission Regulations	

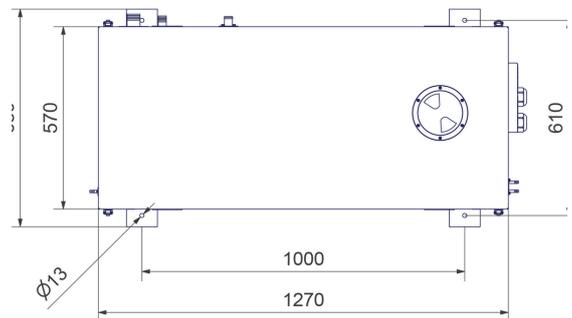

## Service / Installations Kits/ Shock mountings

- Service Kit
- Service Kit "Plus"
- Shock mounting, captive

[LEARN MORE](#)

