

Panda 10000i PVK-UK

Article: 0005535

General Technical Data

Vehicle Generator designed for external installation with integrated water-cooled exhaust and radiator


Generator Type	iSeries - Perfect Power
Generator Family	10000i
Generator Version	PVK-UK
Area of Application	Vehicle
Capsule Type	MPL 4DS
Generator Manufacturer	Fischer Panda GmbH
Windings Isolation Class	H
Control System	iControl
Voltage Tolerance	3%
Cos Phi	0.80
Sound Levels dB(A) [7m/3m/1m]	52 / 62 / 67
Weight (kg)	
Capsule Dimensions (excl. fittings)	1426 x 530 x 620



Electrical Alternator

Engine Speed [rpm]	2200 - 2800
Voltage	230
Frequency [Hz]	50
Number Phases	1
Nominal Performance [kW]	8,0
Nominal Performance [kVA]	10,0

Generator Capsule / Sound Shield

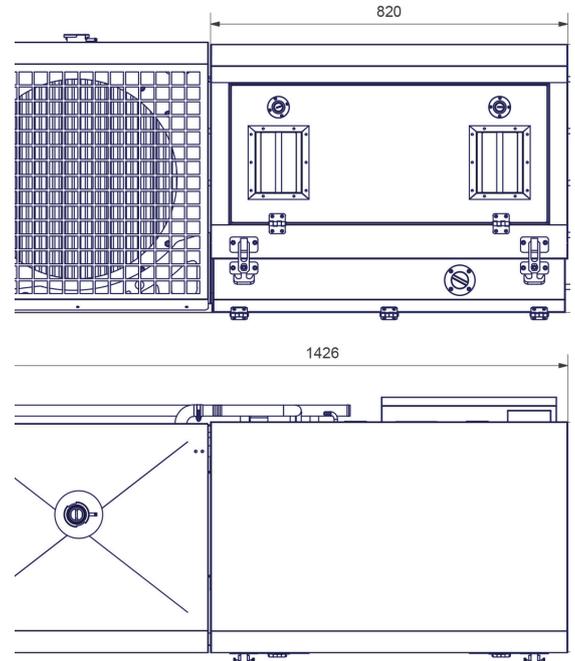

Engine

Engine Manufacturer	Kubota
Engine Type	KU Z602
No. Cylinders	2
Displacement [cm ³]	599
Starter System	12 V
Emission Regulations	US 40CFR 1039 EU 2016/1628 China 20891-2014

Service / Installations Kits/ Shock mountings

Service Kit	0006386
Service Kit "Plus"	0026191
Shock mounting, captive	0002753

[LEARN MORE](#)

