

# Panda 8000x PVK-U

Article: 0033246

## General Technical Data

Vehicle Generator designed for external installation on vehicle chassis with integrated water-cooled exhaust (requires external radiator)

Generator Type	xSeries - Compact Power
Generator Family	8000
Generator Version	PVK-U
Area of Application	Vehicle
Capsule Type	MPL 4DS
Generator Manufacturer	Fischer Panda GmbH
Windings Isolation Class	H
Control System	xControl / fpControl
Voltage Tolerance	3V
Cos Phi	0.85
Sound Levels dB(A) [7m/3m/1m]	52 / 62 / 67
Weight (kg)	279
Capsule Dimensions (excl. fittings)	870 x 523 x 580



## Electrical Alternator

Engine Speed [rpm]	3000
Voltage	230
Frequency [Hz]	50
Number Phases	1
Nominal Performance [kW]	6,8
Nominal Performance [kVA]	8,0


## Engine

Engine Manufacturer	Kubota
Engine Type	KU Z482
No. Cylinders	2
Displacement [cm <sup>3</sup> ]	479
Starter System	12 V
Emission Regulations	US 40CFR 1039 EU 2016/1628 China 20891-2014

## Service / Installations Kits/ Shock mountings

Service Kit	0000693
Service Kit "Plus"	0006365
Shock mounting, captive	0002752

## Generator Capsule / Sound Shield

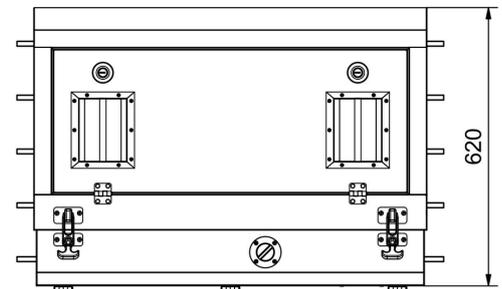

[> LEARN MORE](#)

