

Panda 24x PVMV-N

Article: 0023331

General Technical Data

Vehicle Generator designed for installation within vehicle with integrated water-cooled exhaust (requires external radiator)

Generator Type	xSeries - Compact Power
Generator Family	24x
Generator Version	PVMV-N
Area of Application	Vehicle
Capsule Type	MPL 4DS
Generator Manufacturer	Fischer Panda GmbH
Windings Isolation Class	H
Control System	xControl / fpControl
Voltage Tolerance	3V
Cos Phi	0.85
Sound Levels dB(A) [7m/3m/1m]	55 / 65 / 69
Weight (kg)	465
Capsule Dimensions (excl. fittings)	1220 x 540 x 680



Electrical Alternator

Engine Speed [rpm]	3000
Voltage	230
Frequency [Hz]	50
Number Phases	1
Nominal Performance [kW]	20,4
Nominal Performance [kVA]	24,0



Engine

Engine Manufacturer	Kubota
Engine Type	KU V1505
No. Cylinders	4
Displacement [cm ³]	1498
Starter System	12 V
Emission Regulations	

Service / Installations Kits/ Shock mountings

Service Kit	0000694
Service Kit "Plus"	0006369
Shock mounting, captive	0002754

Generator Capsule / Sound Shield

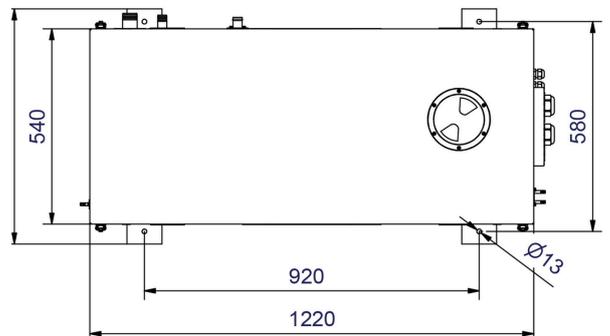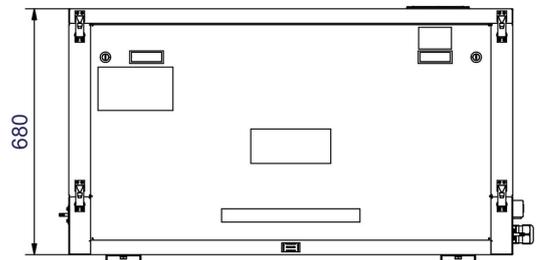

[> LEARN MORE](#)

